

# INCANDESCENT



**800 Series – 12" Cube** 150 Watts Maximum  
**900 Series – 14" Cube** 200 Watts Maximum

*Rustproof  
Post-Top  
Luminaires*


Sleek, uncluttered lines in a contemporary form make these luminaires the natural choices for so many architectural environments. Using the finest thermoplastic polymers available, the cubes are handcrafted with expert precision. A greater  $\frac{3}{16}$ " thickness enhances impact strength and structural beauty. The simple construction affords easy installation and a long life of maintenance-free service. Impressive atop a post or wall bracket.

## Specifications

<b>Lens Enclosure:</b>	Standard in UV-stabilized, impact-resistant acrylic. Colors available are clear, opal white, or smoke bronze. Cubes are provided with four captive stainless steel screws which allow for retention to post fitter by 8-32 brass hex head cap screws.
<b>Post Fitter:</b>	Injection molded UV-stabilized, noncorrosive and nonconductive <b>polycarbonate</b> in black or bronze. Provided with 3 stainless steel tamperproof set screws for attachment to any 3" O.D. post.
<b>Socket:</b>	Medium base ceramic with nickel-plated copper screw shell, rated 250V, 660W with silicone braid leads.
<b>Lamp:</b>	Uses Type A-19 up to 100W; Type A-21 for 150W; Type A-23 for 200W. (Provided by others.)
<b>Diffuser: (optional)</b>	Prismatic diffuser softens the lamp image and enhances appearance and the general distribution of light in translucent lenses. Lexan® <b>polycarbonate</b> diffuser suitable for 75W maximum.
<b>Wall Bracket: (optional)</b>	Aluminum or steel welded construction in black or bronze painted finish. Base measures 6" x 9" and arm measures 2" wide x 3" high x 10" long. Stem comes in 6" or 14" lengths.



800-CL shown with post fitter.

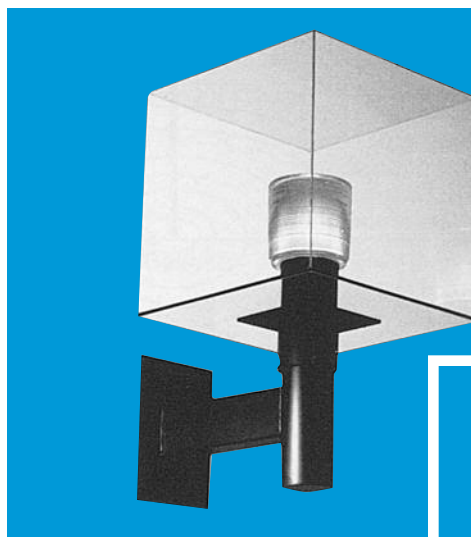

900-CL on 14" stem wall bracket.  
Inset shows short-stem wall bracket.



ETL Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type \_\_\_\_\_  
Catalog Number \_\_\_\_\_  
Job Name \_\_\_\_\_  
Approval \_\_\_\_\_

## WF Harris Lighting

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA  
(704) 283-7477 (OPERATOR ASSIST) • (704) 283-6880 (FAX)  
(800) 842-9345 (TOLL FREE)

e-mail: [customerservice@wfharris.com](mailto:customerservice@wfharris.com)  
[www.wfharrislighting.com](http://www.wfharrislighting.com)

Form 1532

12/15

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs."*

# INCANDESCENT

**Ordering Information** (Fill In Blanks For Complete Catalog Number)

Model	Lens	Fitter	Watts-Lamp	Options
Model	Lens Color	Fitter	Watts-Lamp	Options
800 900	OW-Opal White CL-Clear BZ-Bronze CLB-Clear Bottom with Colored Lens <sup>1</sup>	FK-Black FZ-Bronze	150-INC <sup>3</sup> 200-INC <sup>2,3</sup>	PC-Photo Control PD7-75W Max. Polycarbonate Diffuser ASWBK-6" Aluminum Short-Stem Black Wall Bracket <sup>3</sup> SSWBK-6" Steel Short-Stem Black Wall Bracket <sup>3</sup> SMWBK-14" Steel Medium-Stem Black Wall Bracket <sup>3</sup> GRAPHICS-Numbers, Symbols, Letters, Logos

<sup>1</sup>Ordering Example: OW/CLB

<sup>2</sup>N/A for 800 Series

<sup>3</sup>Provided by Others

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.



## WF Harris Lighting

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA  
(704) 283-7477 (OPERATOR ASSIST) • (704) 283-6880 (FAX)  
(800) 842-9345 (TOLL FREE)

e-mail: [customerservice@wfharris.com](mailto:customerservice@wfharris.com)  
[www.wfharrislighting.com](http://www.wfharrislighting.com)

Printed in USA

Form 1532

12/15

*"W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price."*