

INCANDESCENT



1400 Series—14" Sphere 200 Watts Maximum
1800 Series—18" Sphere 250 Watts Maximum
2200 Series—22" Sphere 300 Watts Maximum

*Rustproof, Vandal-Resistant
Post Top Luminaires*


These contemporary post-top luminaires offer versatility in architectural lighting at its best. One-piece seamless soft cube and spheres are blow molded for excellent lumen transmittance. On posts or wall brackets, these quality luminaires provide a beautiful solution for accent lighting. The simple construction affords easy installation and a long life of maintenance-free service.

Specifications

- Lens** Standard in UV-stabilized, virtually unbreakable
- Enclosures:** polycarbonate. Colors include clear, opal white and smoke bronze. Model 1400 Globe enclosure is attached to twist-lock post fitter. Models 1800 and 2200 globe enclosures are molded with flange at base attached and secured by three 10-32 set screws to post fitter. Optional Lens Lock employs stainless steel tamperproof set screw to prevent removal of lens.
- Post Fitter:** Injection molded UV-stabilized, noncorrosive and nonconductive polycarbonate in black or bronze. Model 1400 is attached to 3" O.D. post and held by 1 screw. Models 1800 and 2200 are secured to a 3" I.D. - 4" O.D. post by three 1/4-20 stainless steel tamperproof set screws.
- Socket:** Medium base ceramic with nickel-plated copper screw shell, rated 250V, 660W, with silicone braid leads.
- Lamp:** Uses Type A-19 up to 100W; Type A-21 for 150W; Type A-23 for 200W; Type PS-30 for 300W. (Provided by others.)
- Diffuser: (optional)** Prismatic diffuser softens the lamp image and enhances appearance and the general distribution of light in translucent lenses. PD7 Lexan® Polycarbonate diffuser suitable for 75W maximum.
- Wall Bracket: (optional)** Aluminum or steel welded construction in black or bronze painted finish. Base measures 6" x 9" and arm measures 2" wide x 3" high x 10" long. Stem available in 6" or 14" lengths.



1400-OW shown on post.

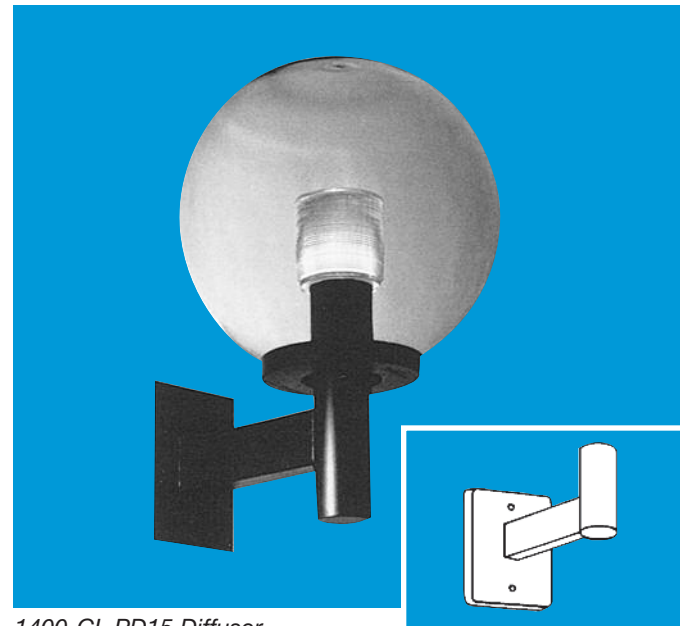

1400-CL PD15 Diffuser on 14" Stem Wall Bracket. Inset shows Short-Stem Wall Bracket.



ETL Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type _____
Catalog Number _____
Job Name _____
Approval _____

WF Harris Lighting, Inc.

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)
e-mail: customerservice@wfharris.com
www.wfharrislighting.com

Form 1531 5/17

"A Live Operator Company Standing Ready to Serve Your Lighting Needs"

INCANDESCENT


Ordering Information (Fill In Blanks For Complete Catalog Number)

Model	Lens	Fitter	Watts-Lamp	Options
Model	Lens Color	Fitter	Watts-Lamp	Options
1400 1800 2200	OW-Opal White CL-Clear BZ-Bronze	FK-Black FZ-Bronze	200-INC ² (Max.) 300-INC ^{1,2} (Max.)	PC-Photo Control LL-Lens Lock PD7-75W Max. Polycarbonate Diffuser ASWBK-6" Aluminum Short Stem Black Wall Bracket ² SSWBK-6" Steel Short Stem Black Wall Bracket ² SMWBK- 14" Steel Medium Stem Black Wall Bracket ²

¹2200 series only
²Provided By Others

Light Distribution Pattern

Model 1800-CL-150-INC
Based On 12' M.H.
Produced From
Test Report No. 30902M

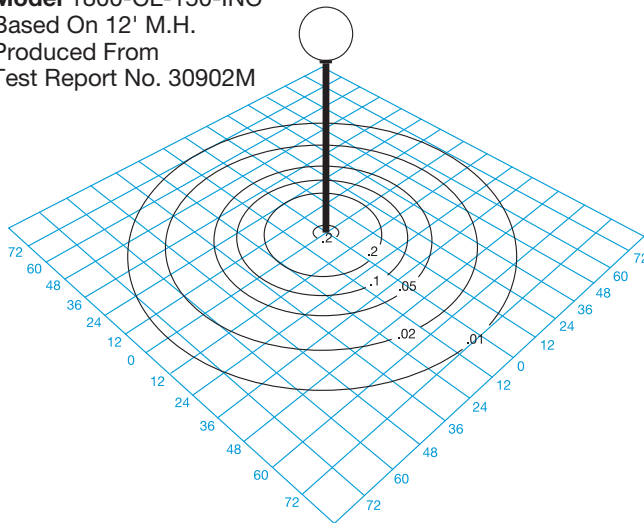

Conversion Table

Lamp	Lamp Conversion Factor	Mounting Height	Height Conversion Factor
300-INC	2.20	8'	2.25
200-INC	1.43	10'	1.44
150-INC	1.00	12'	1.00
100-INC	.63	14'	.74
75-INC	.45		

Using Conversion Table

TO ADJUST FOOTCANDLES (FC) SHOWN IN DIAGRAM AT LEFT, USE FOLLOWING FORMULA WITH LAMP CONVERSION FACTOR (LCF) AND HEIGHT CONVERSION FACTOR (HCF):

$$FC \times LCF = FC \text{ with alternate lamp}$$

$$FC \times HCF = FC \text{ at alternate height}$$

$$FC \times LCF \times HCF = FC \text{ with alternate lamp at alternate height}$$

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.



TAA COMPLIANT
TRADE AGREEMENT ACT COMPLIANT

W.F. Harris Lighting, Inc.

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: customerservice@wfarris.com

www.wfharrislighting.com

Printed in USA

Form 1531

5/17

"W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price."