

LED LAMP FLOODLIGHT



Floodlight Series

Accepts Par 38 LED Lamps

Designed specifically to withstand the corrosive atmosphere of coastal areas, these directional floodlights can weather the most severe environments. These **rust-resistant**, versatile luminaires are constructed of virtually unbreakable, non-conductive **polycarbonate** and are provided with stainless steel hardware. Perfectly suited for landscape, flood and spot lighting. Surface Mount Wiring Box accessory eliminates the need for a recessed junction box in wall and ceiling installations.

Specifications

Housing/ Cover: Injection molded of UV-stabilized **polycarbonate**. Lampholders on Model 201 rotate independently. Threaded pivot of Model 150 is .50" NPT.

Socket: High-temperature ceramic with medium base nickel-plated copper screw shell. Rated 250V, 660W, with wire leads insulated to 105°C.

Gasket: Silicone rubber washer (.125" thick) is permanently secured within lampholder to seal socket and wire-way from moisture with insertion of lamp. Fiber washers provide watertight seal between pivot joints.

Hardware: Stainless steel Phillips truss head screw and wing nut allow angular adjustment to all lampholders. Crossbar and stainless steel mounting screw included with Models 101 and 201. NPT nylon locknut (.50") included with Model 150.

Lamp: Not Included - 150 watts maximum. Recommend LED lamp for greater efficiency and longer lamp life or 90 watt Halogen, 130 volt..

Hood: (optional) One piece, injection molded UV-stabilized **polycarbonate**. Snap-fit mounting requires no tools or hardware. Hoods add with light control. Adds an aesthetic value to any application.

Surface Mount Wiring Box: (optional) For Models 101 and 201 only. One piece injection molded of UV-stabilized **polycarbonate**. Measures .625" deep. Includes .125" thick closed-cell neoprene rubber gasket to seal against moisture and contaminants. Easily attaches with screws or nails.

ETL-US Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94-5V.

Luminaire Type _____
 Catalog Number _____
 Job Name _____
 Approval _____



201-W (White)
 Shown with optional Hoods - sold separately



101-BZ (Bronze)



150-W (White)



201-W-MD (201-W with Motion Sensor)
 Shown with optional Hoods and Wiring Box - sold separately



201-W-PC120
 (201-W with Photo Control)



101-BK (Shown with optional Hood - sold separately)

WF Harris Lighting, Inc.™
 In Business Since 1970!

"A Live Operator Company Standing Ready to Serve Your Lighting Needs"

LED LAMP FLOODLIGHT

Ordering Information

(Fill In Blanks Below For Complete Product Description)

	—		—	
Model		Color		Options (Model 201 only)

<p>101 Single Floodlight</p> <p>150 Threaded Floodlight</p> <p>201 Double Floodlight</p>	<p>BK-Black</p> <p>W-White</p> <p>BZ-Bronze</p>	<p>PC-Photo Control-Black</p> <p>MD-Motion Sensor-White</p> <p>120V/ 60Hz, 2500 SF coverage.</p>
---	--	--

Accessories (Order separately)

HOOD (Model 201 Requires Two)

- 400BK - Black
- 400W - White
- 400BZ - Bronze

SURFACE MOUNT WIRING BOX


<u>Model 101</u>	<u>Model 201</u>
1BK - Black	2BK - Black
1BW - White	2BW - White
1BZ - Bronze	2BZ - Bronze

REPLACEMENT LAMPHOLDER

- LPHBK - Black
- LPHW - White
- LPHBZ - Bronze



1BW Surface Mount Wiring Box (White)

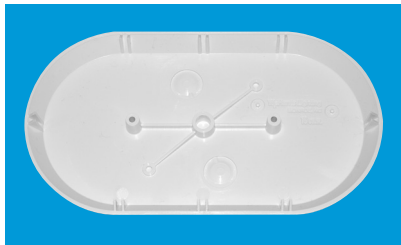

2BW Surface Mount Wiring Box (White)




Model 201-BK Shown With Surface Mount Wiring Box




Model 101-BK Shown With Surface Mount Wiring Box

Dimensions


Model 201

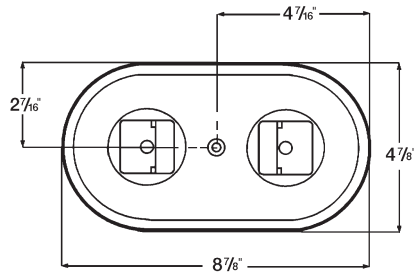


Model 101



Surface Mount Wiring Box For Model 201

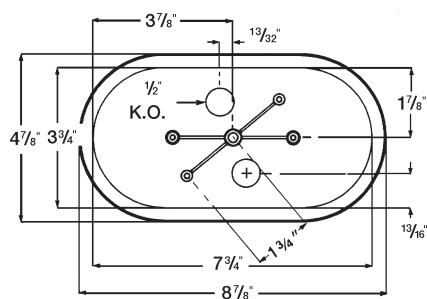

Surface Mount Wiring Box For Model 101



Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

Polycarbonate material carries a Limited Lifetime Warranty.



W.F. Harris Lighting, Inc.™

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

customerservice@wfarris.com

www.wfarrislighting.com