

# INCANDESCENT

## Floodlight Series

Rust and Corrosion Resistant  
150 Watts Maximum



Designed specifically to withstand even the most aggressive weather and atmospheric conditions found in coastal areas, these directional floodlights also include a Motion Sensor Control by Leviton, most well-respected lighting control manufacturer in the industry. **Rust resistant.** These versatile luminaires and motion sensor control are constructed of virtually unbreakable, nonconductive **polycarbonate** and provided with stainless steel hardware. The sensor employs advanced passive infrared technology for accurate monitoring and includes an ambient light override function and manual delayed-off time settings. Adjustable sensitivity reduces false triggers. Convenient delayed off/on time settings from 20 seconds (for test mode) to 15 minutes. Sensor neck adjustment allows 110° vertical, 180° horizontal, and 110° rotational monitoring. Ideally suited for landscape and swimming areas, garages, boathouses, entranceway, porches, decks, and patios. Optional Surface Mount Wiring Box eliminates the need for a recessed junction box in wall and ceiling installations.



201-W-MD Shown with Optional Surface Mount Wiring Box and Directional Hoods

## Specifications

<b>Socket</b>	Injection molded of UV-stabilized <b>polycarbonate</b> .
<b>Housing/ Cover:</b>	Lampholders on Model 201 rotate independently. Threaded pivot of Model 150 is 1/2" NPT.
<b>Socket:</b>	High-temperature phenolic with medium base nickel-plated copper screw shell. Rated 250V, 660W, with wire leads insulated to 105°C.
<b>Gasket:</b>	Silicone rubber washer (1/8" thick) is permanently secured within lampholder to seal socket and wireway from moisture with insertion of lamp. Fiber washers provide watertight seal between pivot joints.
<b>Hardware:</b>	Stainless steel phillips truss head screw and wing nut allow angular adjustment to all lampholders. Crossbar and stainless steel mounting screw included with Models 101 and 201. NPT nylon locknut (1/2") included with Model 150.

<b>Lamp: (LED Optional)</b>	Not included. LED lamps can be purchased with Floodlight. <u>LED Information:</u> Ambient LED Par 38 15W 5000K available for purchase from W. F. Harris Lighting. Suitable for Wet and Dry locations. Lamp manufacturer rated for 22.8 years at 24/7 LED life. LED 15W replaces 100W Incandescent. <u>Incandescent Information:</u> Uses Par 38 lamp. 150 watts maximum. (Not available for purchase.)
<b>Motion Sensor</b>	<b>Leviton</b> 500W, 120V AC 60Hz, 2500 SF coverage.
<b>Hood: (optional)</b>	One piece, injection molded UV-stabilized <b>polycarbonate</b> . Snap-fit mounting requires no tools or hardware. Helps with light control. Adds an aesthetic value to any application.
<b>Surface Mount Wiring Box: (optional)</b>	For Model 201. One piece injection molded of UV-stabilized <b>polycarbonate</b> . Measures 5/8" deep. Includes 1/8" thick closed-cell neoprene rubber gasket to seal against moisture and contaminants. Easily attaches with screws or nails.



## ETL-US Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94-5V.

Luminaire Type \_\_\_\_\_  
Catalog Number \_\_\_\_\_  
Job Name \_\_\_\_\_  
Approval \_\_\_\_\_

# W.F. Harris Lighting, Inc.™

## Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA  
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)  
customerservice@wfharris.com  
www.wfharrislighting.com

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs"*

# INCANDESCENT


## Ordering Information (Fill In Blanks For Complete Catalog Number)

201-W-MD \_\_\_\_\_  
 Model Options


Model  
 201-W-MD Double Floodlight, White, with Motion Sensor

Option  
 400W-White Hood (Requires Two)  
 2BW-White Surface Mount Wiring Box

## Dimensions

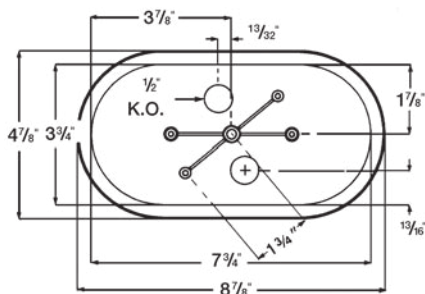

Surface Mount Wiring Box For Model 201

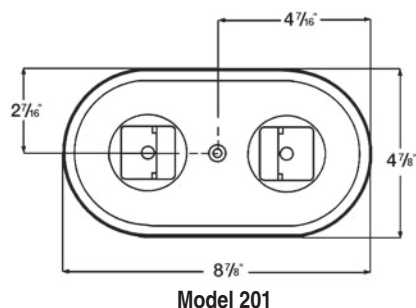

Model 201

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

**Polycarbonate material carries a Limited Lifetime Warranty.**



## W.F. Harris Lighting, Inc.™

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA  
 704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)  
 customerservice@wfharris.com  
 www.wfharrislighting.com