

# LED LINEAR LUMINAIRE

## Model 200-LED-8K8



Designed for ambient and freezer applications where efficiency and style are as important as endurance, dependability and reduced operating costs. Impact resistant **polycarbonate** lens is less prone to damage. The non-conductive housing assures more safety to the end user; and its special U-shaped channel with non-shifting, poured-in-place gasket allows the flanged lens to fit snugly for a continuous seal. **Quality engineered to resist rust, corrosion, moisture, dust and impact. Operates in temperatures up to 55°C (131°F) and down to -40°C (-40°F).** High quality LEDs and Drivers ensure high reliability and durability while delivering low power consumption.

**LEDs contain no mercury and emit no ultraviolet light.**

**LEDs do not break, unlike conventional lamps, if fixture is dropped.**



### Specifications

**Lens:** Vacuum-formed impact resistant **polycarbonate** lens facilitates maximum light control and emission; smooth exterior allows ease of cleaning. Edge is flanged to fit into the gasketed retention channel of the housing for a continuous seal against moisture and dust.

**Housing:** Compression-molded fiberglass reinforced polyester (self-extinguishing ASTM D635-74). U-shaped channel allows flanged lens to fit snugly. One-piece construction designed to facilitate portability.

**Gasket:** Continuous poured-in-place gasket completely fills the perimeter channel of the housing and accepts lens flange for maximum seal integrity against moisture, dust and water washdown. Gasket cannot separate, shift or fall out.

**LEDs:** **High Quality Lighting Grade LEDs**  
Lighting grade LEDs mounted on a .125" aluminum plate.  
5,000K - 7,000K Color temperature.  
**Net Lumens: 8,800 Power: 92 W Efficacy: 96 Lm/W**  
**Up to 50,000 hours (25°C/77°F) = 6 years of 24/7 LED life**  
Calculations Based on US Department of Energy Worksheet.  
DOE TM-21-11, 70%.  
**LEDs warranted for five (5) years**

**Driver:** **High Quality Drivers**  
Class 2 Power Supply.  
AC Input: 120V—277V 50/60Hz  
**FC cRUUS**  
Complies with FCC rules and regulations, as per Title 47 CFR Part 15 Non-Consumer (Class A) for EMI/RFI (conducted and radiated) at full load.  
**Warranted for five (5) years by Driver manufacturer.**

**Mounting: (Optional)** Mounting Strap for flush mount, Bracket for chain mount, or Eyebolts for chain mount. Chains are not included.

**Latches:** Standard are three pairs of white injection molded high impact Celcon suitcase style latches that secure a positive seal between housing, gasket and lens. Special tamperproof latches of stainless steel (for marine applications) or polycarbonate are available as a custom component. W. F. Harris Lighting recommends using the optional stainless steel latches for any luminaire being used outside.

ETL-US and ETL-C Listed (UL 1598)  
USDA Certified for Food Area Applications  
NSF Certified for Non-Food Zone Applications

The polycarbonate lens carries a flammability rating of 94HB or better. The self-extinguishing fiberglass housing has the superior SE-O rating.

Luminaire Type \_\_\_\_\_  
Catalog Number \_\_\_\_\_  
Product Code \_\_\_\_\_  
Job Name \_\_\_\_\_  
Approval \_\_\_\_\_



**SBA QUALIFIED  
SMALL BUSINESS MANUFACTURER**

**TAA COMPLIANT**  
TRADE AGREEMENT ACT COMPLIANT

**WF Harris Lighting, Inc.**

**Innovative Lighting Designs Since 1970**  
P.O. Box 5023, Monroe, NC 28111-5023, USA  
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)  
e-mail: customerservice@wfharris.com  
www.wfharrislighting.com

Form 2585 5/17

*"A Live Operator Company Standing Ready to Serve Your Lighting Needs"*

# LED LINEAR LUMINAIRE

## Ordering Information

Fill In Blocks For Complete Catalog Number

-

**Model**

200-LED-8K8

**Options**

**MS**-Mounting Strap Installation Kit (Contains 2) Mounting Installation Kit (Contains 2) (Chain not included)  
**2EC**-Eyebolt Chain Mounting Installation Kit (Contains 2) (Chain not included)  
**OS**-Occupancy Sensor  
**LSS**-Stainless Steel Latches\*  
**LSS-TP**-Stainless Steel Tamperproof Latches\*


**LCWTP**-Tamperproof Celcon Latches\*  
**LPC**-Polycarbonate Latches\*  
**LPCTP**-Tamperproof Polycarbonate Latches\*

\*Special Latches Available as Custom Components. Consult Factory for Availability.

## Dimensions


**External Side View**

(Fixture shown with Chain Mounting Brackets)

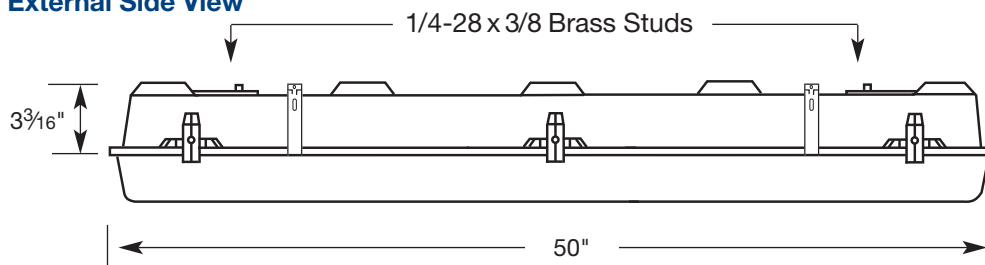


**External End View**

(Fixture shown with Mounting Straps)



**External End View**

(Fixture shown with Eyebolt Mount)



## LEDs and the W. F. Harris Lighting Advantage

The lighting grade LEDs used by W. F. Harris Lighting provide the long sought-after stability demanded for commercial illumination in brightness, efficacy, life time, and color temperatures. Can be used in commercial/industrial illumination applications, hospitals, schools, universities, government buildings, military installations and freezer applications.

W. F. Harris Lighting LED-based luminaires reduce ownership costs through four factors —

- (1) Maintenance avoidance – LEDs last much longer than traditional lamps plus the fixture is non-rusting and vandal resistant.
- (2) Reduced energy cost of the LEDs.
- (3) Reduced cost in operation of freezer compressors due to lower wattage and less heat.
- (4) LEDs do not break if dropped, unlike conventional lamps.

These lighting grade LEDs offer efficient illumination that - depending on the application - can last up to 100,000 hours before their light output falls below 70% of original illumination and even longer in refrigerated environments.

## Application-specific units available to meet a customer's unique lighting requirements.

After the customer provides W. F. Harris Lighting with specific requirements for a lighting application, our in-house LED Application Engineering Department will adjust the fixture to satisfy those requirements. Once completed, a Product Code will be assigned and used to order application-specific units.



**SBA QUALIFIED  
SMALL BUSINESS MANUFACTURER**

**TAA COMPLIANT**  
TRADE AGREEMENT ACT COMPLIANT

**POLYCARBONATE LENS CARRYS A  
LIFETIME WARRANTY AGAINST BREAKAGE.**

Specifications Subject to Change Without Notice

**W.F. Harris Lighting, Inc.**

**Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA

704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: customerservice@wfharris.com

www.wfharrislighting.com

Printed in USA

Form 2585

5/17

*"W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price"*