

50 SERIES

Energy Efficient Lighting



50M-D



50S-F

Wall or Ceiling Mount

Energy Efficient
Fluorescent Lamps

Acrylic or
Polycarbonate Lens

Aluminum
Base Plate


WF Harris Lighting

FEATURES

- Opal white smooth or clear prismatic acrylic lens standard, opal white smooth or clear prismatic polycarbonate lens optional.
- Aluminum base plate painted white.
- Compact fluorescent lamps.
- Pre-heat ballast in NPF or HPF, 120v or 277v, and all electronic ballast(s) are high power factor 120v through 277v.
- All ballasts are Class P rated.
- Three nylon lens retaining screws for positive relamping.
- Ideal for hallways, corridors, canopies, stairwells and breezeways in schools and universities, and commercial, industrial, government and civic facilities.
- ETL-US and ETL-C listed. Suitable for damp locations.

Ordering Information (Fill In Blocks For Complete Catalog Number)

Example:



MODEL	LENS	WATTS-LAMP	POWER FACTOR	VOLTS	OPTIONS
50S	F (Flat Lens)	2-7 PL	NPF ¹	120	LP - Lamp
	D (Dome Lens)	2-9 PL	HPF	120-277	HK - Black Finish on Base Plate
		2-13 PL			PY - Polycarbonate Lens
		2-13 2GX7(EB) ²			CW - 0°F Ballast for One PL Lamp
		26 PLC			CW2 - 0°F Ballast for Two PL Lamps
		22 FL			CW3 - 0°F Ballast for Three PL Lamps
50M	F	2-26 PLC	NPF	120	
	M	3-9 PL	HPF	120-277	
		3-13 2GX7(EB) ²			
		32 FL			
		22/33 PL			
		40 FL			
		32/40 FL			


¹ Available with twin tube fixtures only. NPF 2-7PL, 2-9PL, and 2-13PL.


² Available in 120-277 HPF only.

FLUORESCENT LAMP PERFORMANCE

	Twin Tube			Quad Tube	Circline		
	7 W	9 W	13 W	26 W	22 W	32 W	40 W
Input Watts	11 W	13 W	17 W	35 W	27 W	42 W	50 W
Lumen Output	400	600	900	1,800	1,050	1,925	2,750
Lamp life (Hours)	10,000	10,000	10,000	10,000	12,000	12,000	12,000
Minimum Starting Temperature	0°F	25°F	32°F	32°F	50°F	50°F	50°F

DIMENSIONS

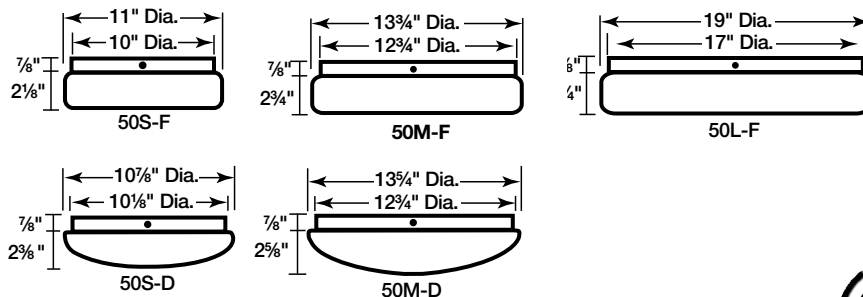

 Made in Monroe, North Carolina USA, a short drive from Charlotte.

WF Harris Lighting

Innovative Lighting Designs Since 1970



4015 Airport Ext. Road, PO Box 5023, NC 28111 • (704) 283-7477 • Toll Free (800) 842-9345

www.wfharris.com

email: customerservice@wfharris.com

FAX (704)283-6880

Printed in USA 1/12
Form: BO5.R2012

(Specifications subject to change without notice.)

"Live Operator Company Standing Ready To Serve Your Lighting Needs."